

Globe's Standard Lifts Lead the Industry In Durability and Productivity



Our AA Series lift tables are economical and they handle uniform loads with maximum travel.

- Knee-action arms for maximum vertical travel in a minimal space.
- Specifically designed for uniform loads.
- Wide array of capabilities such as positioning, stacking, feeding and palletizing.

AA Lift Tables

Model Number	Lifting Capacity	Vertical Travel	Lowered Height	Platform Size (1)	Frame Size	Motor HP (2)	Raise Time (2)	Approx Weight (3)
AA-5-24	500 lbs.	24 in.	6-1/2 in.	13 in. x 24 in.*	13 in. x 24 in.	3/4	6 sec.	315 lbs.
AA-5-36	500 lbs.	36 in.	6-1/2 in.	18 in. x 33 in.*	18 in. x 33 in.	3/4	7 sec.	350 lbs.
AA-1-24	1,000 lbs.	24 in.	6-1/2 in.	13 in. x 24 in.*	13 in. x 24 in.	3/4	8 sec.	315 lbs.
AA-1-36	1,000 lbs.	36 in.	6-1/2 in.	18 in. x 33 in.*	18 in. x 33 in.	3/4	14 sec.	350 lbs.
AA-2-36	2,000 lbs.	36 in.	8-1/2 in.	32 in. x 48 in.	23-1/2 in. x 47 in.	3/4	16 sec.	675 lbs.
AA-2-48	2,000 lbs.	48 in.	8-1/2 in.	32 in. x 60 in.	23-1/2 in. x 59 in.	3/4	22 sec.	825 lbs.
AA-2-60	2,000 lbs.	60 in.	9-3/4 in.	32 in. x 72 in.	23-1/2 in. x 69 in.	3/4	52 sec.	975 lbs.
AA-2-72	2,000 lbs.	72 in.	10 in.	32 in. x 84 in.	31 in. x 72 in.	1 1/2	60 sec.	1,800 lbs.
AA-4-36	4,000 lbs.	36 in.	8-1/2 in.	32 in. x 48 in.	23-1/2 in. x 47 in.	3/4	33 sec.	800 lbs.
AA-4-48	4,000 lbs.	48 in.	8-1/2 in.	32 in. x 60 in.	23-1/2 in. x 59 in.	3/4	43 sec.	1,100 lbs.
AA-4-60	4,000 lbs.	60 in.	9-3/4 in.	32 in. x 72 in.	23-1/2 in. x 69 in.	1 1/2	52 sec.	1,200 lbs.
AA-4-72	4,000 lbs.	72 in.	10 in.	32 in. x 84 in.	31 in. x 72 in.	1 1/2	60 sec.	2,600 lbs.
AA-6-36	6,000 lbs.	36 in.	8-1/2 in.	32 in. x 50 in.	26 in. x 49 in.	3/4	55 sec.	1,200 lbs.
AA-6-48	6,000 lbs.	48 in.	9 in.	32 in. x 60 in.	27 in. x 59 in.	1 1/2	43 sec.	1,240 lbs.
AA-6-60	6,000 lbs.	60 in.	10 in.	32 in. x 72 in.	27 in. x 69 in.	1 1/2	54 sec.	2,000 lbs.

*Due to space limitations, these units can only be furnished with external pump units. Standard hose length is 10'.


Your choice of either a push button or foot switch control. Paint color "Belgrade" standard. Anchor clips for floor mounting standard. 10' power cord with plug on single phase units. Pump units may be internally or externally mounted, consult factory for short frame size requirements.

(1) Custom platform sizes available as an option, depending on application requirements.

(2) Standard 3/4 HP pumps are single phase, 1-1/2 HP and larger pumps are three phase. Larger pump units are available for faster raise time, consult factory.

(3) Weights shown do not include crating, packaging, etc.

Globe Torque Lifts

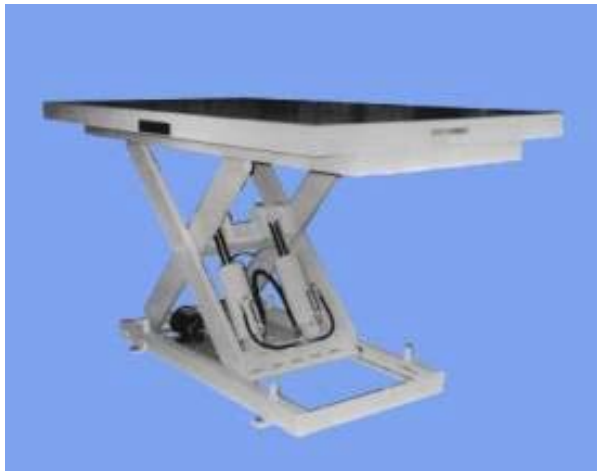

The most stable design available, Globe Torque lifts are the ideal units for any type of conveyor and handle high capacities with ease.

- Torsion-bar design provides up to 50% off-center capability with maximum stability.
- Allows concentrated loading, stationary or moving.
- Handles rolls of paper, coils of steel, sheet stacks, dies, totes, etc.
- Multiple cylinders for oscillation free vertical movement.

TX Lift Tables

Model Number	Lifting Capacity	Vertical Travel	Lowered Height	Platform Size (1)	Frame Size	Motor HP (2)	Raise Time (2)	Approx Weight (3)
TX-2-36	2,000 lbs.	36 in.	8 in.	36 in x 72 in.	28 in. x 60 in.	3/4	23 sec.	1,200 lbs.
TX-2-48	2,000 lbs.	48 in.	10 in.	36 in. x 84 in.	28 in. x 78 in.	3/4	35 sec.	1,700 lbs.
TX-2-60	2,000 lbs.	60 in.	10 in.	60 in x 110 in.	50 in. x 96 in.	1 1/2	40 sec.	2,100 lbs.
TX-4-36	4,000 lbs.	36 in.	8 in.	36 in. x 72 in.	28 in. x 60 in.	3/4	41 sec.	1,360 lbs.
TX-4-48	4,000 lbs.	48 in.	10 in.	36 in. x 84 in.	28 in. x 78 in.	3/4	60 sec.	2,200 lbs.
TX-4-60	4,000 lbs.	60 in.	12 in.	60 in. x 110 in.	50 in. x 96 in.	1 1/2	40 sec.	2,400 lbs.
TX-6-36	6,000 lbs.	36 in.	12 in.	36 in. x 72 in.	28 in. x 60 in.	1 1/2	20 sec.	1,900 lbs.
TX-6-48	6,000 lbs.	48 in.	12 in.	36 in. x 84 in.	28 in. x 78 in.	1 1/2	65 sec.	2,500 lbs.
TX-6-60	6,000 lbs.	60 in.	12 in.	60 in. x 110 in.	50 in. x 96 in.	3	40 sec.	2,600 lbs.
TX-8-36	8,000 lbs.	36 in.	12 in.	48 in. x 72 in.	35 in. x 66 in.	3	22 sec.	2,200 lbs.
TX-8-48	8,000 lbs.	48 in.	14 in.	48 in. x 84 in.	35 in. x 78 in.	3	35 sec.	3,200 lbs.
TX-8-60	8,000 lbs.	60 in.	15 in.	60 in x 110 in.	50 in. x 96 in.	3	40 sec.	3,400 lbs.
TX-10-36	10,000 lbs.	36 in.	15 in.	48 in. x 72 in.	30 in. x 66 in.	3	30 sec.	2,600 lbs.
TX-10-48	10,000 lbs.	48 in.	15 in.	48 in. x 96 in.	40 in. x 88 in.	3	35 sec.	3,650 lbs.
TX-10-60	10,000 lbs.	60 in.	15 in.	60 in. x 110 in.	50 in. x 96 in.	3	40 sec.	4,000 lbs.
TX-15-36	15,000 lbs.	36 in.	16 in.	48 in. x 72 in.	40 in. x 66 in.	3	40 sec.	3,100 lbs.
TX-15-48	15,000 lbs.	48 in.	16 in.	48 in. x 96 in.	40 in. x 88 in.	3	45 sec.	3,800 lbs.
TX-15-60	15,000 lbs.	60 in.	16 in.	72 in. x 110 in.	60 in. x 100 in.	5	40 sec.	5,000 lbs.
TX-20-36	20,000 lbs.	36 in.	16 in.	48 in. x 72 in.	40 in. x 66 in.	3	45 sec.	3,700 lbs.
TX-20-48	20,000 lbs.	48 in.	16 in.	48 in. x 96 in.	40 in. x 88 in.	3	60 sec.	5,000 lbs.
TX-20-60	20,000 lbs.	60 in.	16 in.	72 in. x 110 in.	60 in. x 100 in.	5	40 sec.	5,600 lbs.
TX-30-36	30,000 lbs.	36 in.	18 in.	48 in. x 72 in.	40 in. x 66 in.	5	35 sec.	3,800 lbs.
TX-30-48	30,000 lbs.	48 in.	18 in.	48 in. x 96 in.	40 in. x 88 in.	5	50 sec.	6,000 lbs.
TX-30-60	30,000 lbs.	60 in.	19 in.	72 in. x 110 in.	60 in. x 100 in.	5	65 sec.	6,500 lbs.

Push button or foot switch control, standard. Paint color "Belgrade" standard. Anchor clips for floor mounting standard. 10' Power cord with plug on single phase units. Pump units may be internally or externally mounted.

(1) Custom platform sizes available as an option, depending on application requirements.

(2) Standard ¾ pumps are single phase, 1-1/2 HP and larger pumps are three phase. Larger pump units are available for faster raise time, consult factory.

(3) Weights shown do not include crating, packaging, etc.

Beyond Quality . . .Globe Delivers Satisfaction and Value

Globe's EZ floor level lifts provide a variety of benefits, including helping to lower operating costs, improve material handling efficiency and reduce employee back injuries.

- Decks lower to floor level, allowing loading and unloading of pallets, carts, baskets, gaylords, etc., without the need for lift trucks and dedicated operators.
- Handles rolling loads with no need for pits, ramps or fork lifts.
- Needs only one person using manual floor equipment.
- Applications include palletizing and depalletizing, conveyor loading and unloading and truck or machine loading and unloading.



EZ Lift Tables

Model Number	Lifting Capacity	Vertical Travel	Lowered Height	Platform Size (1)	Frame Size	Motor HP (2)	Raise Time (2)	Approx Weight (3)
EZ-1-32	1,000 lbs	32 in.	1/2 in.	50 in. x 48 in.	80 in. x 58 in.	3/4	35 sec.	1,500 lbs.
EZ-1-48	1,000 lbs	48 in.	1/2 in.	50 in. x 72 in.	80 in. x 82 in.	3/4	55 sec.	2,550 lbs.
EZ-2-32	2,000 lbs	32 in.	1/2 in.	50 in. x 48 in.	80 in. x 58 in.	3/4	35 sec.	1,500 lbs.
EZ-2-48	2,000 lbs	48 in.	1/2 in.	50 in. x 72 in.	80 in. x 82 in.	3/4	55 sec.	2,550 lbs.
EZ-4-32	4,000 lbs	32 in.	3/4 in.	50 in. x 48 in.	80 in. x 58 in.	3/4	45 sec.	1,800 lbs.
EZ-4-48	4,000 lbs	48 in.	3/4 in.	50 in. x 72 in.	80 in. x 82 in.	3/4	70 sec.	2,800 lbs.

Push button control standard. Paint color "Belgrade" standard. Anchor holes for floor mounting standard. 10' power cord with plug, standard. Pump units are externally mounted, standard hose length is 10'. Call for pricing on 6,000 lb. units.

(1) Custom platform sizes available as an option, depending on application requirements.

(2) Standard 3/4 HP pumps are single phase. Larger pump units are available for faster raise time, consult factory.

(3) Weights shown do not include crating, packaging, etc.



Standard Features

Globe lifts incorporate the following standard features:

- Anti-friction bearings on all scissor rollers to reduce power requirements and extend service life.
- Self-lubricating bearings on all major pivot points to reduce wear.
- Chrome-plated cylinder rods for extended seal life.
- Sealed and coated hydraulic reservoir lining to prevent oil contamination.
- Hydraulic suction line strainer to reduce maintenance concerns.
- Hydraulics cylinders vented back to hydraulic tank to reduce outside system contamination.
- Self-contained valve assemblies to reduce fittings and leakage.
- NEMA 12 electrics.
- NEMA 4 push button or NEMA 1 foot switch control.
- Totally enclosed motors.
- All units are finished with a primer coat and two coats of equipment enamel.
- Operating and maintenance manual included.
- Heavy duty steel platforms for long wear.
- Anchor clips.
- Internal or external pump-units.
- Single phase pump-units are provided with 10' power cord with plug.

Globe Safety Features

The safety of your employees is important so the following safety features are included as standard equipment on all Globe lift tables:

- Lifts and tilters designed to meet or exceed ANSI MH 29.1 and ANSI MH 29.2 standards.
- Pressure compensated flow control valves at each cylinder for controlled descent in case of hydraulic system failure to help protect personnel and loads.
- Scissor rollers encapsulated in structural steel channels to prevent platform "kick-up".*
- Maintenance safety stops for service personnel protection.
- "Maintained contact" type control switches prevent lift movement without direct operator control.
- Safety labeling to meet ANSI MH 29.1 standards.

* Except EX models which do not require this feature.



GLOBE INTERNATIONAL WARRANTY

ALL PRODUCTS MANUFACTURED BY SELLER AND SOLD UNDER THESE STANDARD TERMS ARE WARRANTED BY THE SELLER TO BE FREE FROM DEFECTS IN MATERIALS AND WORKMANSHIP FOR A PERIOD OF TWELVE (12) MONTHS FROM DELIVERY TO PURCHASER WHEN PROPERLY INSTALLED, USED, MAINTAINED AND SERVICED. ALL MANUFACTURERS' WARRANTIES ON PRODUCTS NOT MANUFACTURED BY THE SELLER ARE HEREBY ASSIGNED TO PURCHASER, AND SELLER MAKES NO WARRANTY OR GUARANTY OF ANY SUCH PRODUCTS.

THIS WARRANTY SHALL NOT APPLY AND SELLER SHALL HAVE NO RESPONSIBILITY OR LIABILITY FOR ANY CLAIMED DEFECT WHICH IS ATTRIBUTABLE IN WHOLE OR IN PART TO ANY REPAIR OR ALTERATION BY ANY PERSON OTHER THAN THE SELLER; TO MISUSE, NEGLIGENCE, OR ACCIDENT; OR TO ANY WORK PERFORMED ON THE PRODUCT OR MATERIAL SUPPLIED FOR THE PRODUCT, DURING OR AFTER MANUFACTURE OR DESIGN OF ALL OR PART OF THE PRODUCT BY ANY PERSON OTHER THAN THE SELLER.

SELLER'S LIABILITY FOR BREACH OF THIS WARRANTY OR FOR BREACH OF ANY STANDARD OF CARE OR DUTY OWED TO PURCHASER UNDER ANY CONTRACT, OR UNDER ANY THEORY OF NEGLIGENCE OR OF ANY DEFECTIVE PRODUCT OR PART THEREOF AT SELLER'S FACTORY OR SUCH OTHER REASONABLE PLACE SHALL BE DESIGNATED BY SELLER UPON DELIVERY F.O.B. TO SUCH LOCATION BY PURCHASER. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES TO PERSONS OR PROPERTY.

IT IS FURTHER UNDERSTOOD THAT THE PRICE FOR EQUIPMENT IS A CONSIDERATION IN LIMITING GLOBE'S LIABILITY.

THIS WARRANTY IS GIVEN IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND ALL WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE ARE SPECIFICALLY EXCLUDED.